



# TECHNICAL DATA SHEET - TOPWELL 10 STANDARD





grooved PVC / textile

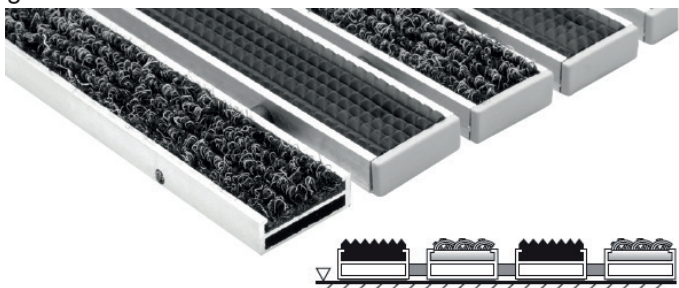

textile

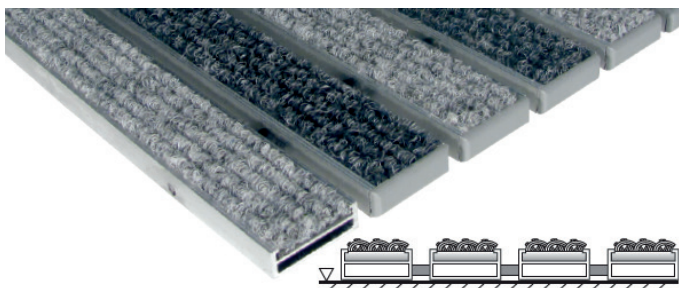

grooved PVC

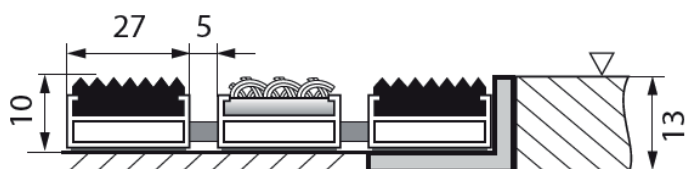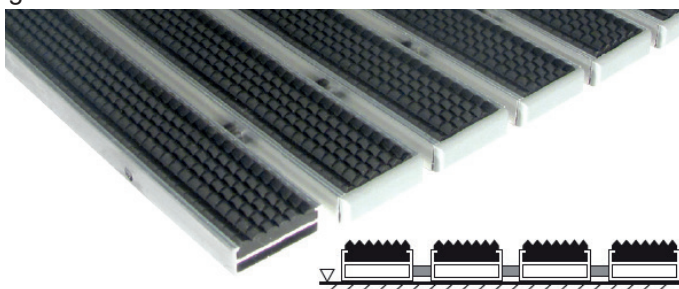

The foundation of TOPWELL 10 mm STANDARD mats are 27 mm wide aluminium sections connected by a stainless steel wire and separated by rubber rings, which make it possible to roll the mat for easier handling when cleaning.

The aluminium sections can be infilled with grooved PVC or textile strips are inserted into the aluminium sections.

Infills can be combined as required and replaced when worn out. Not suitable for revolving doors.

TOPWELL 10 mm STANDARD mat with Cleanwell Atrium textile filling or grooved PVC filling can be used for escape routes and is certified according to EN 13501-1 + A 1:2010:

Reaction to fire classification: Bfl-s1



## Technical parameters

<b>Design:</b>	grooved PVC strip, textile strip
<b>Dimensions:</b>	according to the client's requirements
<b>Height:</b>	10 mm
<b>Weight:</b>	10 kg/m <sup>2</sup>
<b>Installation:</b>	at floor level in a 13 × 30 × 3 mm L-frame or freely placed on the floor with a 45 mm wide tapered aluminium frame
<b>Resistance:</b>	maximum load 2.5t/100 cm <sup>2</sup>
<b>Use:</b>	entrance areas to hotels, banks, restaurants, office buildings, as well as family homes