




TECHNICAL DATA SHEET – TOPWELL 22 EXTRA

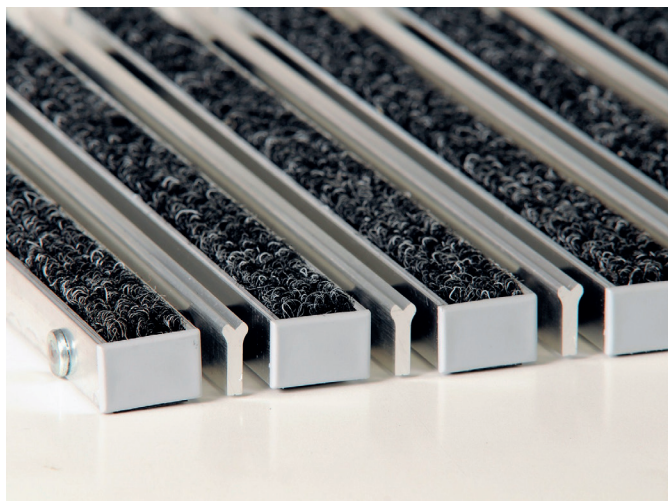


grooved PVC / brush strip 3

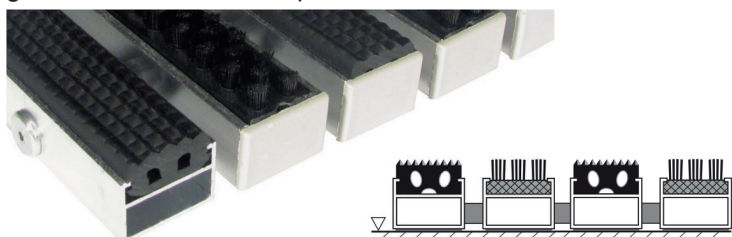


textile / brush strip 3

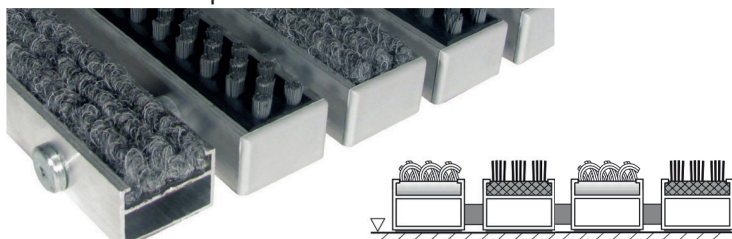


brush strip 3 / grooved PVC x 2

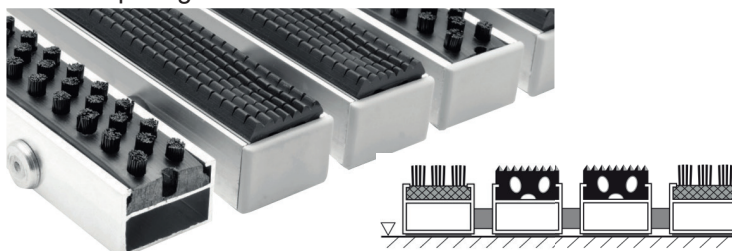

grooved PVC / Y-shaped aluminium

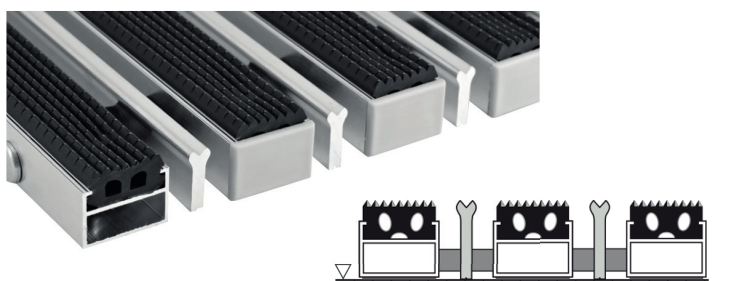

textile / Y-shaped aluminium

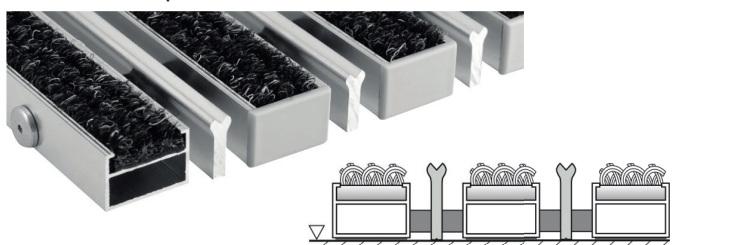


The foundation of TOPWELL 22 mm EXTRA mats is 27 mm wide aluminium sections, which are connected by a stainless steel wire and separated by rubber rings, making it possible to roll the mat for better handling when cleaning.

The aluminium sections can be infilled with grooved PVC, textile or brush strips, and can be combined with an aluminium scraper as required..

Infills can be combined as required and replaced when worn out.

The TOPWELL 22 mm Extra mats can be used on escape routes with a fire-resistant infill and are certified according to EN 13501-1+A1:2010. Reaction to fire classification: Bfl-s1

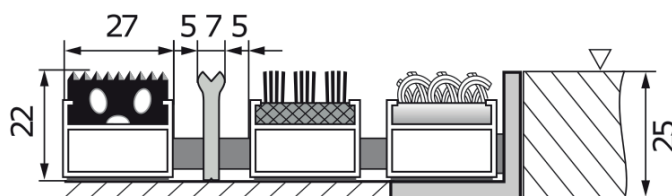

Technical data

Design: grooved PVC strip, textile strip, brush strip, Y-shaped aluminium scraper

Dimensions: according to the client's requirements

Height: 22 mm

Weight: 16 kg / m²

Installation: at floor level in 25 × 25 × 3 mm L-frame or freely placed on the floor with a 45mm (up to 120cm) or 65mm tapered aluminium frame

Resistance: maximum load 7t/100 cm²

Use: entrance areas to hotels, banks, restaurants, office buildings, as well as family homes