



# TECHNICAL DATA SHEET – TOPWELL 22 STANDARD




grooved PVC

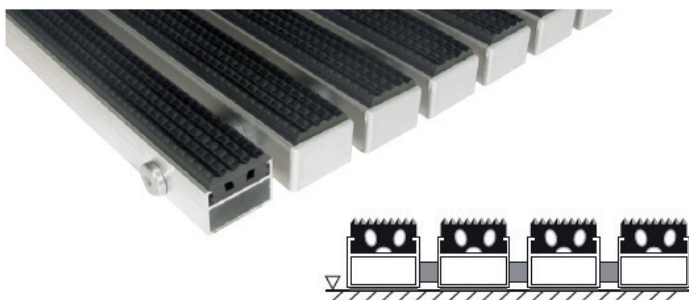

textile

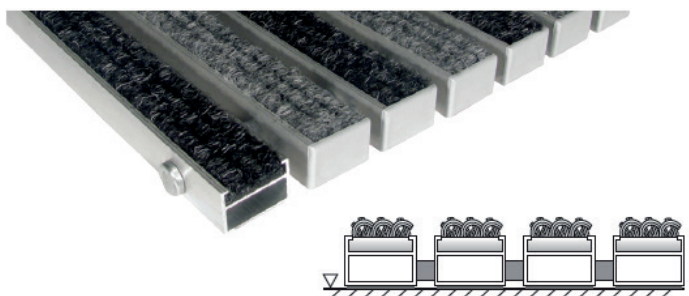

grooved PVC / textile

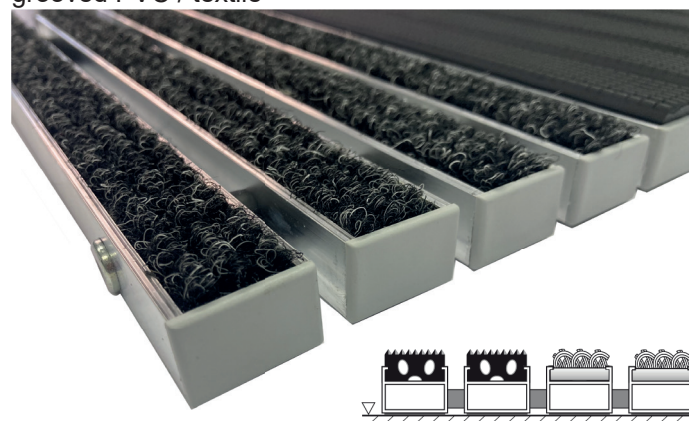


The foundation of TOPWELL 22mm STANDARD mat are 27mm wide aluminium sections, connected by a stainless steel wire and separated by rubber rings, making it possible to roll the mat for better handling when cleaning. Grooved PVC or textile strips are inserted into the aluminium sections.

Fillings can be combined at will and replaced when worn out.

Non-flammable type  
TOPWELL 22mm STANDARD mat with a non-flammable filling may be used for emergency exits and is certified to EN 13501-1+A1:2010.

Reaction to fire: Bfl-s1

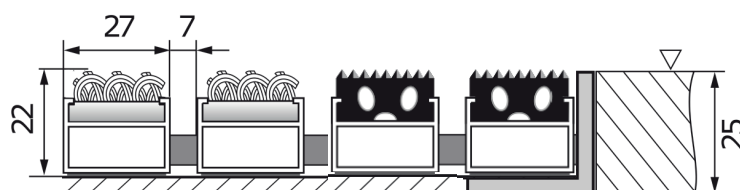

## Technical data

<b>Design:</b>	grooved PVC strips, textile strips, alternately grooved PVC/textile strips
<b>Dimensions:</b>	according to the client's requirements
<b>Height:</b>	22 mm
<b>Weight:</b>	grooved PVC - 16 kg/m <sup>2</sup> textile - 14 kg/m <sup>2</sup>
<b>Installation:</b>	at floor level in 25 × 25 × 3 mm L-frame or freely placed on the floor with a 45mm (up to 120cm) or 65mm tapered aluminium frame
<b>Resistance:</b>	maximum load 7 t / 100 cm <sup>2</sup>
<b>Use:</b>	entrance areas to hotels, banks, restaurants, office buildings, as well as family homes

