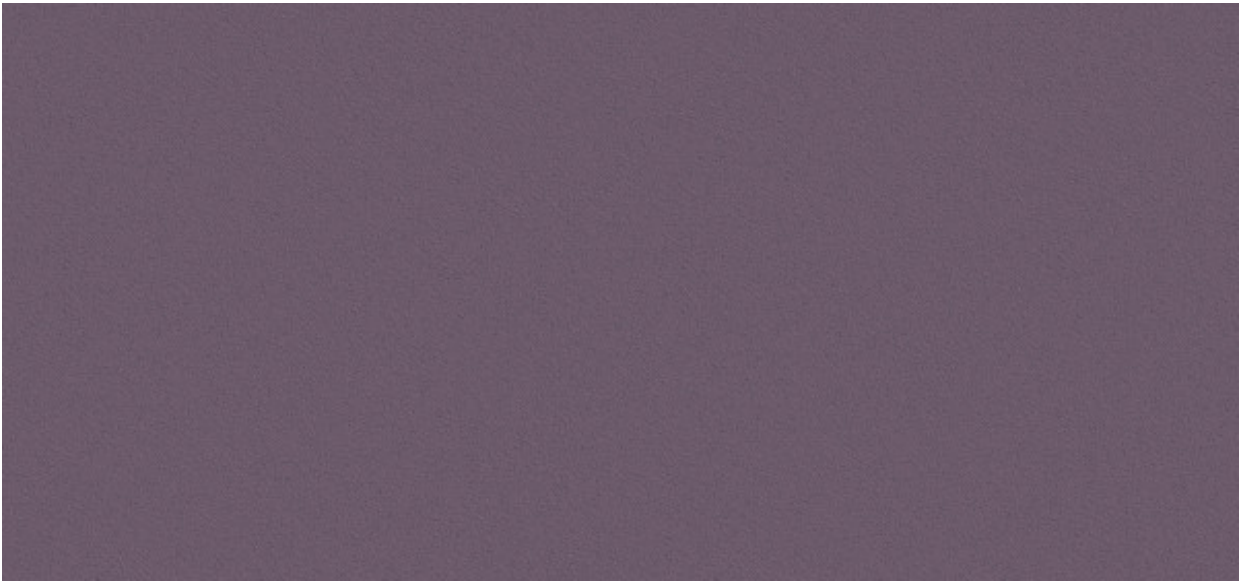


Nero










































1024.01 - 1024.54



Product	Weight
Wallcovering	± 350 gr/m², ± 15 oz/yd¹
Description	Flame retardancy
Uni-quality with silver sand texture	EN 13501 , B, s1 - d0
Composition	ASTM E84 , Pass, A
Water-based ink printed vinyl coating, cotton backing	IMO 2010 FTP part 2-5 , Pass
Width	Labels
± 130 cm, ± 51/52 inches	 USCG - EU MRA 0038  EMISSIONS DANS L'AIR INTERIEUR A+ A B C  vinylplus COMMITTED TO SUSTAINABLE DEVELOPMENT  EN 15102

Nero

1024.01 - 1024.54

								
1024.52	1024.53	1024.50	1024.49	1024.46	1024.28	1024.47	1024.51	1024.54
								
1024.21	1024.39	1024.36	1024.33	1024.43	1024.44	1024.45	1024.48	1024.42
								
1024.24	1024.31	1024.12	1024.25	1024.19	1024.40	1024.37	1024.38	1024.41
								
1024.13	1024.02	1024.05	1024.22	1024.26	1024.27	1024.09	1024.06	1024.03
								
1024.16	1024.01	1024.04	1024.07	1024.08	1024.11	1024.23	1024.10	1024.20
								
1024.35	1024.32	1024.29	1024.30	1024.15	1024.18	1024.14	1024.17	1024.34