



TECHNICAL DATA SHEET – TOPWELL 27 EXTRA




grooved PVC / brush 1

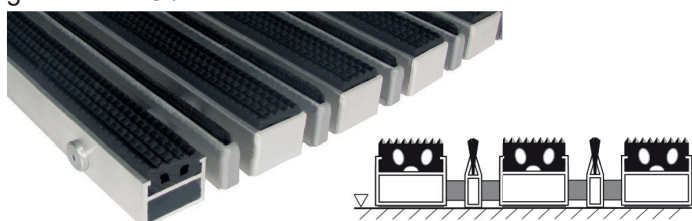


grooved PVC / Y-shaped aluminium

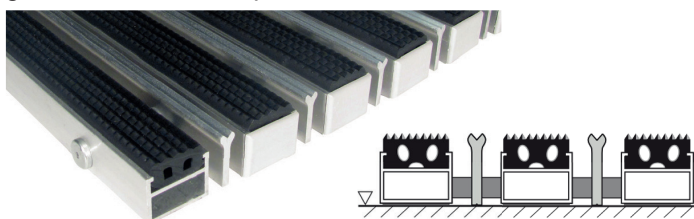


grooved PVC / brush strip 3

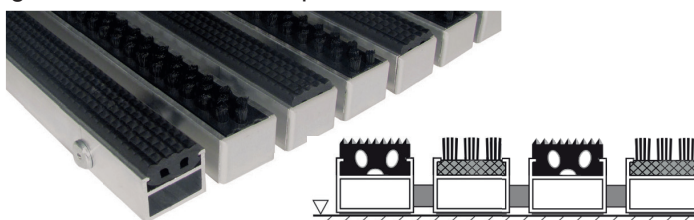

brush strips / textile strips

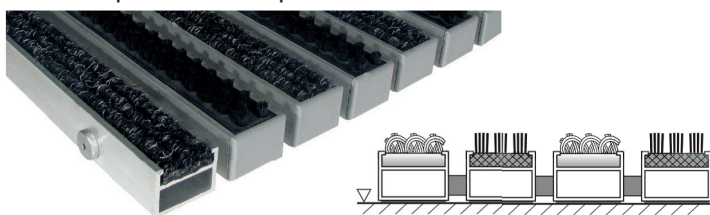

textile / Y-shaped aluminium

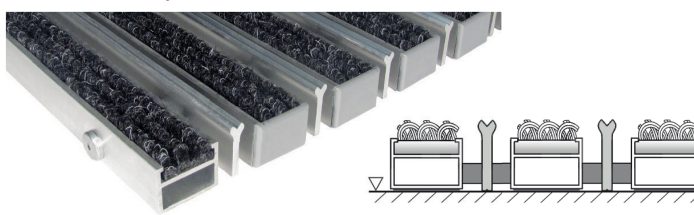


The foundation of TOPWELL 27mm EXTRA mats are 27mm wide aluminium sections, which alternate with either aluminium Y-shape sections or brush sections.

All is connected by a stainless steel wire and separated by rubber rings, making it possible to roll the mat for better handling when cleaning. Grooved PVC, textile or brush strips are inserted into the aluminium sections.

Fillings can be combined at will and replaced when worn out.

Non-flammable type
TOPWELL 27mm EXTRA mat with a non-flammable rubber filling may be used for emergency exits and is certified to EN 13501-1+A1:2010.

Reaction to fire: Bfl-s1

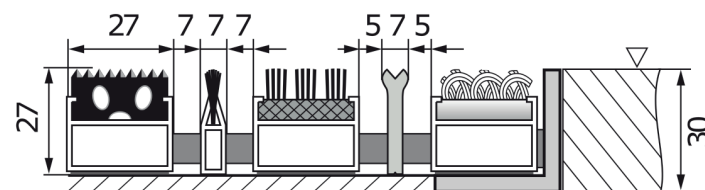

Technical data

Design: grooved PVC strip, textile strip, brush strip, Y-shaped aluminium scraper, narrow brush

Dimensions: according to the client's requirements

Height: 27 mm

Weight: 15 - 17 kg/m²

Installation: at floor level in prepared holes fitted with a 30 × 30 × 3 mm aluminium/stainless steel frame or freely laid on the floor in a 45 mm (up to 120 cm) or 65 mm aluminium frame

Resistance: maximum load 8.5 t/100 cm²

Use: entrances to shopping centres and department stores with high traffic, entrances to hotels, banks and restaurants

